



UPUL1090 - recessed
UPUL2090 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 5.95 ft³ 6.17
 h25cm lb 6.83 ft³ 6.17

Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED


Type	Article	Colours	Version	Source
UP	UL 1 090 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 63W - diffused beam 3000K
	UL 2 090 LED (h25 cm)	RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 4904 lm 78 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1090LED** | **RU** | **IN** |

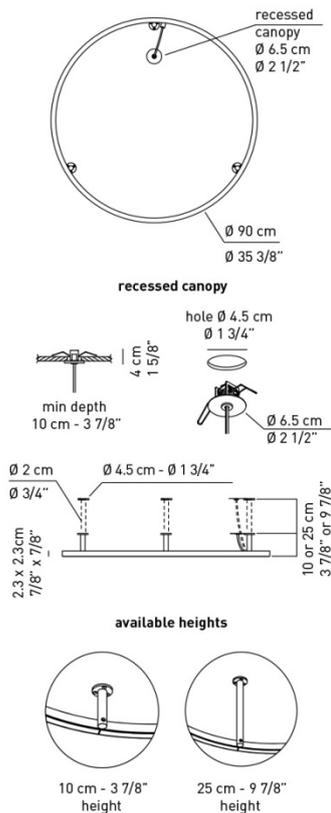

Available colors



CUSTOMER _____ NOTES _____

UPUL _ 090LED _ _ IN _____

Luminous flux for all built-in LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the





UPUL1120 - recessed
UPUL2120 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.
 Available in several colors and sizes.

Typology: WALL, CEILING LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser

h10cm lb 7.05 ft³ 10.76
 h25cm lb 7.93 ft³ 10.76

Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED



Type	Article	Colours	Version	Source
UP	UL 1 120 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 86W - diffused beam 3000K
	UL 2 120 LED (h25 cm)	RU rust brown		

DRY LOCATION CRI90 120/277VAC **LED** 7354 lm 86 lm/W

hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL2120LED** | **AN** | **IN** |

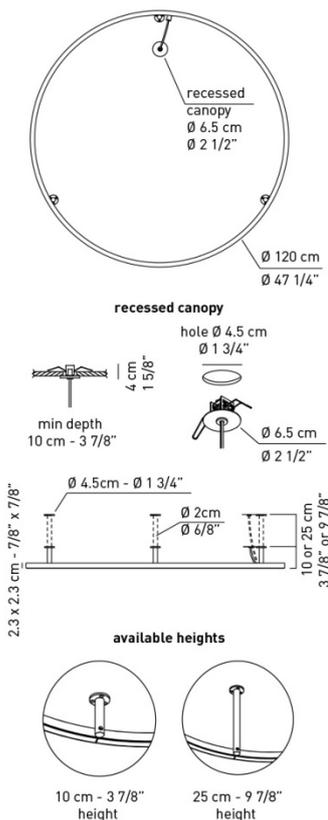

CUSTOMER _____ NOTES _____

UPUL _ 120LED _ _ IN _____

Luminous flux for all built-in LED luminaires is shown at source level.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the





UPUL1160 - recessed
UPUL2160 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminum.
 Available in several colors and sizes.


Typology: WALL, CEILING LAMP

Ratings

- Built in **LED** module
- CCT 3000 K
- Uplight (towards surface)
- Remote LED driver(s)
- Installs to ceiling or wall (requires recessed strain relief)
- Power supply 120/277V AC
- Switch mode: on-off
- Dimmable 1-10V LED driver (remote)
- Painted aluminum profile 23 x 23 mm
- Opalescent diffuser


h10cm lb 11.02 ft³ 20.12
 h25cm lb 11.90 ft³ 20.12

Product code composition



U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER INCLUDED

Type	Article	Colours	Version	Source
UP	UL 1 160 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 125W - diffused beam 3000K
	UL 2 160 LED (h25 cm)	RU rust brown		




DRY LOCATION CRI90 120/277VAC **LED** 11000 lm 88 lm/W


hole Ø 4,5 cm - 1 3/4" / min depth 10 cm - 3 7/8"

Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code | **UP** | **UL1160LED** | **RU** | **IN** |



available heights



Available colors



AN
Anthracite grey

RU
Rust brown

CUSTOMER _____ NOTES _____

UPUL _ 160LED _ _ IN

Luminous flux for all built-in LED luminaires is shown at source level.

Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
 404.876.1064 sales@illumco.com