VELVET - UP VEL 160 - technical sheet

Light sources	E26 model: E26 5 x 60W * E26 model: E26 5 x 26W fluo, self ballasted FLE * FLE model: 2G11 4 x 55W, 120V, Twin tube LED model: LED GU24 5 x 15W dimmable included, 120V, 2700K, CRI 82, 7950 lm source, 106 lm/W LAMPS ARE NOT INCLUDED, EXCEPT FOR LED MODEL
Installation	Mounts to standard electrical box
Structure	White painted metal
Diffuser	Pongé fabric - Glow wire 960 °C | Jersey - Glow wire 750 °C
Diffuser colours	BC, BL, BW, GI, MA, MT, NE, RB, RS, VE
Lampshade	Micro 2000 flame retardant fabric 80% polyester + 20% cotton Fleece finishing 100% polyester Weight 276 ± 5% gr/m² Abrasion resistance (Martindale) 25.000 ± 10% rubs Pilling grade 4/5 | Light fastness grade 4/5 + self-extinguishing PVC. | Glow wire 750 °C
Lampshade colours	AR, AZ, BA, BC, BL, MA, NE, RB

Product code composition

MODEL	LAMPSHADE COLOURS	RADIAL DIFFUSER COLOURS	LIGHT SOURCES
UPVEL160 E26	AR, AZ, BA, BC, BL, MA, NE, RB	BC, BL, BW, GI, MA, MT, NE, RB, RS, VE	E26 5 x 60W or E26 5 x 26W fluo
UPVEL160 FLE			2G11 4 x 55W 120V
UPVEL160 LED			GU24 LED 5 x 15W

code structure: MODEL LIGHT EXTERIOR INTERIOR

LAMPSHADE COLOUR CODE:

- **AR** (arancio) orange, orange, anaranjado
- **AZ** (azzurro) light blue, bleu ciel, azul cielo
- **BA** (bianco avorio) ivory white, blanc ivoire, blanco marfil
- **BC** (bianco ghiaccio) ice white, blanc bleute, blanco hielo
- **BL** (blu) blue, bleu, azul
- **MA** (marrone) brown, marron, marrón
- **NE** (nero) black, noir, negro
- **RB** (rosso bordeaux) maroon, bordeaux, rojo burdeos

DIFFUSER COLOUR CODE:

- **BC** (bianco) white, blanc, blanco
- **BL** (blu elettrico) electric blue, bleu, azul eléctrico
- **BW** (bianco caldo) warm white, blanc chaud, blanco cálido
- **GI** (giallo oro) gold yellow, jaune or, amarillo oro
- **MA** (marrone) brown, marron, marrón
- **MT** (mattone) brick red, brique, rojo oscuro
- **NE** (nero) black, noir, negro
- **RB** (rosso bordeaux) maroon, bordeaux, rojo burdeos
- **RS** (rosso) red, rouge, rojo
- **VE** (verde) green, vert, verde

*** Most fixtures equipped with E26 sockets that accommodate medium base lamps may also be available in a GU24 twist and lock compact fluorescent socket or may be relabled to a lower maximum wattage to acommodate energy efficiency and TITLE 24 requirements.**

UP VEL 160
Design by Manuel Vivian

Collection of pendants, ceiling, wall, and floor lights. The lampshade is covered with flame retardant Micro 2000 fabric (polyester and cotton). Sizes vary from 19 5/8" to 63" diameter. The radial light diffuser is hand wrapped with pongé fabric stripes, available in several colours (wall light only availabe with methacrylate diffuser).

Typology: CEILING LIGHT

Certifications: Intertek CE **TITLE 24 COMPLIANT DRY LOCATION ONLY**

Standard Shipment: 10-14 weeks
Fast Shipment: 6-8 weeks

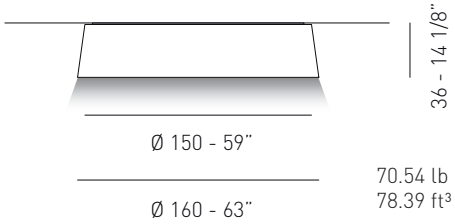

70.54 lb
78.39 ft³

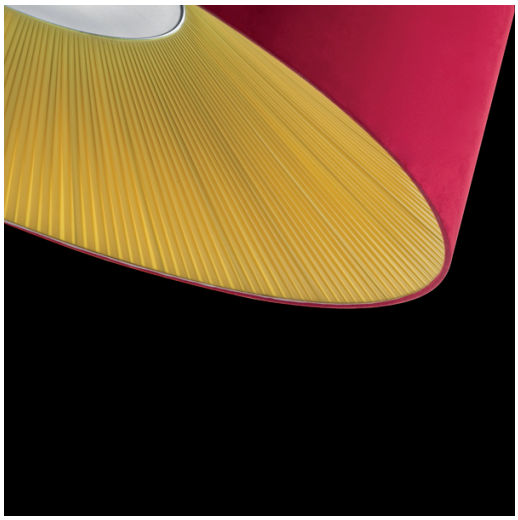

UPVEL160 ___ ___ ___

NAME: _____

NOTES: _____

Visit w

Please Not
Axo Ligh
technical
1-2015 te

illuminations
425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com