



**USVEL050**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: SUSPENDED LAMP


**Ratings**

- E26 or GX24q-4 or GU24 LED
- Downlight and upper diffused
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

lb 11 ft<sup>3</sup> 8.82

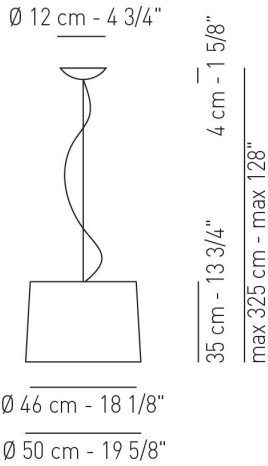

Product code composition  
**VELVET / diffuser INCLUDED**

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
US	VEL 050 E26	BC ice white	BC white	E26 1 x Max 17W LED or 1 x Max 26W fluo
	VEL 050 FLE	AR orange	BL electric blue	FLE GX24q-4 1x42W 120VAc
	VEL 050 LED	AZ light blue	BW warm white	LED GU24 1x15W - included 120VAc - CRI 80 diffused beam - 2700K 1600 lm - 107 lm/W 
		BA ivory white	GI gold yellow	
		BL blue	MA brown	
		MA brown	MT brick red	
		NE black	NE black	
		RB burgundy	RB burgundy	
			RS red	
			VE green	


**Lampshade**

Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m<sup>2</sup>  
Abrasion resistance (Martindale) 25.000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C




example composition code |US |VEL050LED |MA |BW |

Available lampshade colors

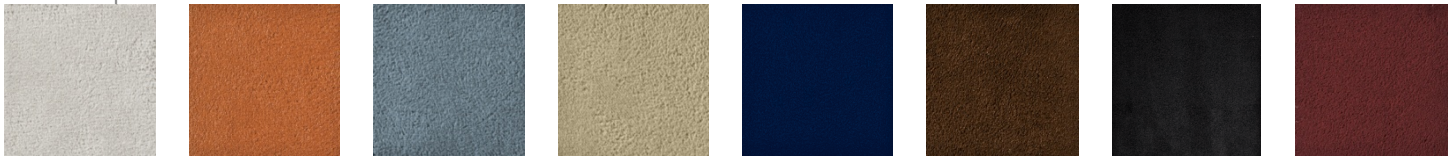

BC Ice white    AR Orange    AZ Light blue    BA Ivory white    BL Blue    MA Brown    NE Black    RB Burgundy

Available radial diffuser colors



BC White    BL Electric blue    BW Warm white    GI Gold yellow    MA Brown    MT Brick red    NE Black    RB Burgundy    RS Red    VE Green

USVEL050\_-----

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_



425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com

Luminous flux for all built-in LED luminaires is shown at source level.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the



**USVEL070**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: SUSPENDED LAMP


**Ratings**

- E26 or GX24q-4 or GU24 LED
- Downlight and upper diffused
- Installs over 4 in. octagonal J-box
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs

lb 14.33 ft<sup>3</sup> 16.95

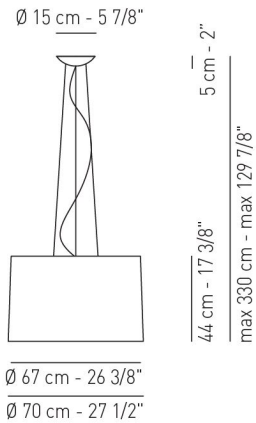

Product code composition

VELVET / diffuser INCLUDED

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
US	VEL 070 E26	BC ice white	BC white	E26 1 x Max 17W LED or 1 x Max 26W fluo
	VEL 070 FLE	AR orange	BL electric blue	FLE GX24q-4 1x42W 120Vac
	VEL 070 LED	AZ light blue	BW warm white	LED GU24 1x15W - included 120VAC - CRI 80 diffused beam - 2700K 1600 lm - 107 lm/W
			GI gold yellow	Dimmable ELV TRAILING EDGE PHASE CUT LED
		BL blue	MA brown	
		MA brown	MT brick red	
		NE black	NE black	
		RB burgundy	RB burgundy	
			RS red	
			VE green	


**Lampshade**

Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m<sup>2</sup>  
Abrasion resistance (Martindale) 25.000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C




example composition code |Us |VEL070E26 |AZ |BL |

Available lampshade colors

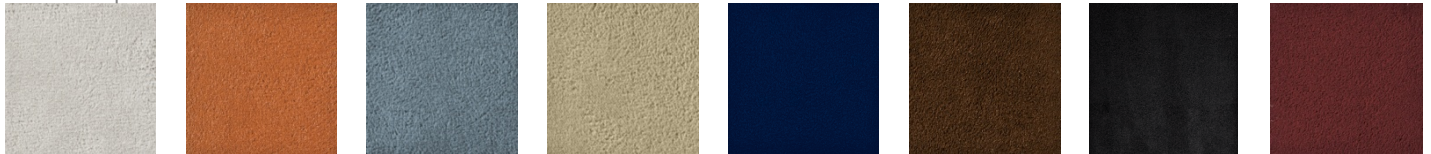

BC Ice white    AR Orange    AZ Light blue    BA Ivory white    BL Blue    MA Brown    NE Black    RB Burgundy

Available radial diffuser colors



BC White    BL Electric blue    BW Warm white    GI Gold yellow    MA Brown    MT Brick red    NE Black    RB Burgundy    RS Red    VE Green

USVEL070\_\_\_\_\_

CUSTOMER\_\_\_\_\_

NOTES\_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the

**illuminations**  
425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064 sales@illumco.com



**USVEL100**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: SUSPENDED LAMP

**Ratings**

- E26 or GX24q-4 or GU24 LED or built in LED
- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**L10 BUILT IN LED VERSION**

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable ELV 0-10V LED driver

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs


**FLE VERSION**

- Power supply 120/277V AC

lb 38.58 ft³ 40.96

Product code composition

VELVET / diffuser INCLUDED, with upward and downward lighting

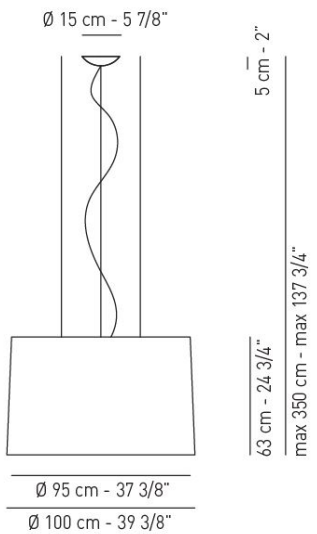


Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
US	VEL 100 E26	BC ice white	BC white	E26 4 x Max 17W LED or 4 x Max 26W fluo
	VEL 100 FLE	AR orange	BL electric blue	FLE GX24q-4 3x42W + 1x42W 120/277VAC
	VEL 100 LED	AZ light blue	BW warm white	LED GU24 4x15W - included 120VAC - CRI 80 diffused beam - 2700K 6400 lm - 107 lm/W - dimmable ELV TRAILING EDGE PHASE CUT LED
		BA ivory white	GI gold yellow	
VEL 100 L10	BL blue	MA brown	MA brown	L10 95W LED - integrated 120/277VAC - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W - dimmable ELV 0-10V LED
		MA brown	MT brick red	
	NE black	NE black		
	RB burgundy	RB burgundy		
	RS red	RS red		
	VE green	VE green		

**Lampshade**  
Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m²  
Abrasion resistance (Martindale) 25.000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C



example composition code | US | VEL100FLE | BC | BC |

Available lampshade colors

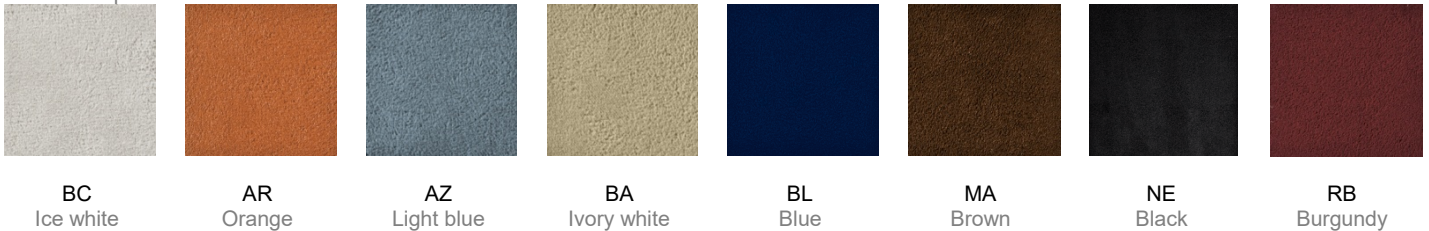

Available radial diffuser colors



USVEL100\_\_\_\_\_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

Luminous flux for all built-in LED luminaires is shown at source level.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of the

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305  
404.876.1064  
sales@illumco.com



**USVEL160**  
Design by Manuel Vivian

Collection of ceiling and suspended lamps. The cone-shaped lampshade is covered with a flame-retardant Micro 2000 fabric, which has a suede effect. Available in several colours and sizes.

Typology: SUSPENDED LAMP

**Ratings**

- E26 or GX24q-4 or GU24 LED or built in LED
- Downlight and uplight
- Installs over 4 in. octagonal J-box (support independently)
- Power supply 120V AC
- Switch mode: on-off
- Steel frame

**L10 BUILT IN LED VERSION**

- CCT 3000 K, CRI 90
- Power supply 120/277V AC
- Dimmable ELV 0-10V LED driver

**GU24 LED VERSION**

- CCT 2700 K, CRI 80
- Dimmable ELV trailing edge, phase cut LED bulbs


**FLE VERSION**

- Power supply 120/277V AC

Product code composition

VELVET / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
US	VEL 160 E26	BC ice white	BC white	E26 5 x Max 17W LED or 5 x Max 26W fluo
	VEL 160 FLE	AR orange	BL electric blue	FLE GX24q-4 4x42W + GX24q-5 1x57W 120/277VAC
	VEL 160 LED	AZ light blue	BW warm white	LED GU24 5x15W - included 120VAC - CRI 80 diffused beam - 2700K 8000 lm - 107 lm/W - dimmable ELV TRAILING EDGE PHASE CUT LED
		BA ivory white	GI gold yellow	
	VEL 160 L10	BL blue	MA brown	L10 95W LED - integrated 120/277VAC - CRI90 diffused beam - 3000K 10700 lm - 113 lm/W - dimmable ELV 0-10V LED
			MA brown	
		NE black	NE black	
		RB burgundy	RB burgundy	
		RS red	RS red	
			VE green	

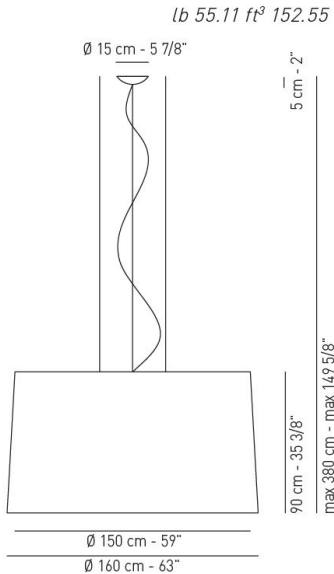


**Lampshade**  
Micro 2000 flame retardant fabric 80% polyester + 20% cotton  
Fleece finishing 100% polyester  
Weight 276 ± 5% gr/m<sup>2</sup>  
Abrasion resistance (Martindale) 25,000 ± 10% rubs  
Pilling grade 4/5  
Light fastness grade 4/5 + self-extinguishing PVC.  
Glow wire 750 °C




example composition code |US|VEL160E26|BA|MT

Available lampshade colors

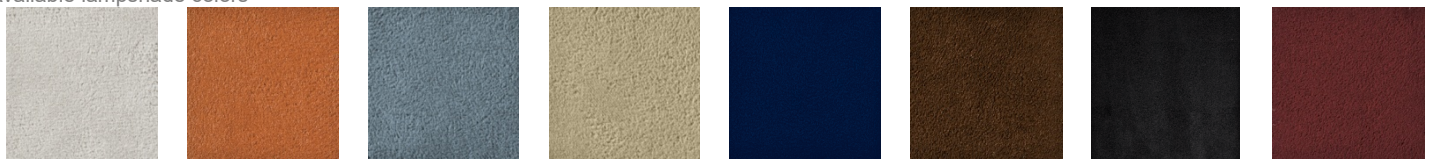

BC Ice white    AR Orange    AZ Light blue    BA Ivory white    BL Blue    MA Brown    NE Black    RB Burgundy

Available radial diffuser colors



BC White    BL Electric blue    BW Warm white    GI Gold yellow    MA Brown    MT Brick red    NE Black    RB Burgundy    RS Red    VE Green

USVEL160\_\_\_\_\_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_



Luminous flux for all built-in LED luminaires is shown at source level. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the