
Thalia - LED PENDANT





©2020 cerno LLC. All rights reserved. Specification subject to change without notice. The information contained in this drawing is the sole property of cerno IIc. Any reproduction i SALES@CERNOGROUP.COM - 949.715.1534

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305 404.876.1064 sales@illumco.com

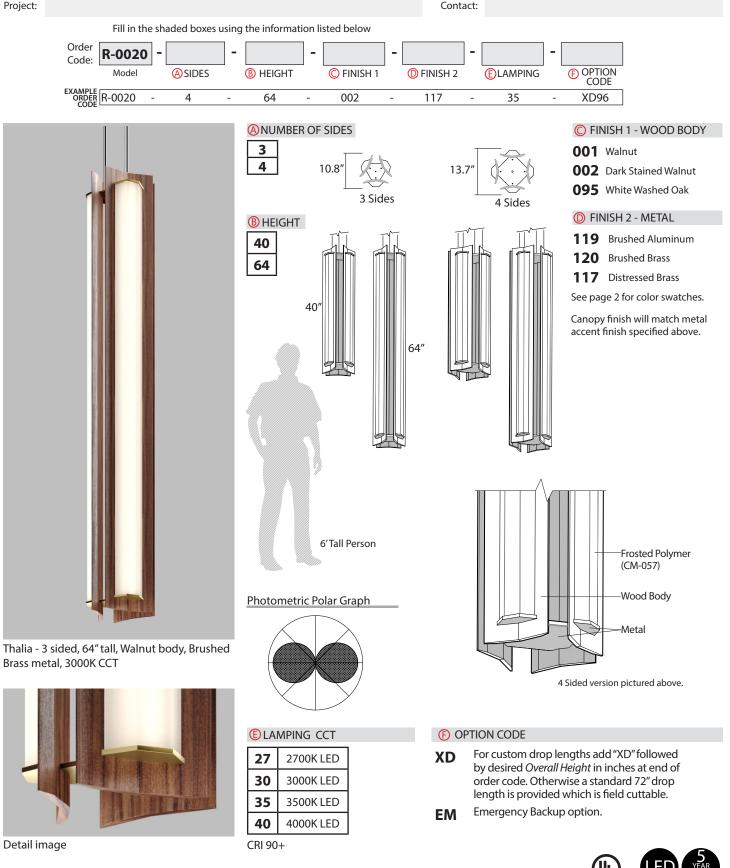

Weight / Lumen Output / Wattage / Cords / Cables

Fixture height	Number of sides	Weight (Lbs.)	Lumens (source)	Wattage	Number of Drivers	Number of cords (SVT)	Numbers of suspension cables
40″	3	25	4590	63	1	1	3
	4	33	6120	84	1	1	4
64″	3	32	7650	105	2	2	3
	4	42	10200	140	2	2	4

Driver Specs

120-277VAC Input

0-10V dimming down to 1% with dim to off


Drivers to be mounted remote at a maximum distance of 50' including pendant drop distance, provided a 12 gauge wire is used.

Driver dimension is 7" x1.5" x 1"

Canopy Suspension Cables and Electrical Cords

3 sided 5.5" Ø X2"H canopy 3 suspension cables 1 - 2 SVT electrical cord





4 sided

8"ØX1.25"H canopy

4 suspension cables

Provide blocking for attaching mounting plate to ceiling. Weight of fixture must be supported independent of the J box

Finish 1 - WOOD BODY



001 Walnut CM - 001



002 Dark Stained Walnut CM - 002

095 White Washed Oak CM - 095

Finish 2 - METAL



Brushed Aluminum CM - 119 120 Brushed Brass CM - 120 117 Distressed Brass CM - 117

