


Warranty:

# LINE CEILING





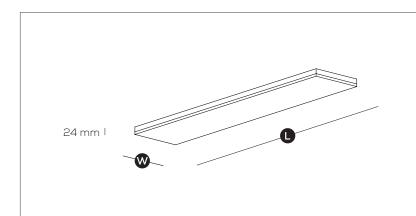





425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305

sales@illumco.com





	11.81 x 47.24 in	11.81 x 59.06 in	11.81 x 70.87 in	7.87 x 94.49 in	7.87 x 118.11 in
ELECTRICAL SPECS.					
Voltage: Driver - transformer: Consumption P1: Consumption P2: Dimmability:	24 V DC AC/DC 24 V 26 W 53 W DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	24 V DC AC/DC 24 V 33 W 66 W DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	24 V DC AC/DC 24 V 40 W 80 W DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	24 V DC AC/DC 24 V 53 W 106 W DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)	24 V DC AC/DC 24 V 66 W 132 W DMX, DALI, 1-10 V (with PWM) and Potentiometer (with PWM)
PYISICAL SPECS.					
Thickness: Weight: Materials: Size:	0.94 in 19.84 lb Acrylic (PMMA) - Aluminium 11.81 in 47.24 in	0.94 in 26.45 lb Acrylic (PMMA) - Aluminium 11.81 in 59.06 in	0.94 in 30.86 lb Acrylic (PMMA) - Aluminium 11.81 in 70.87 in	0.94 in 26.45 lb Acrylic (PMMA) - Aluminium 7.87 in 94.49 in	0.94 in 33.07 lb Acrylic (PMMA) - Aluminium 7.87 in 118.11 in
LED					
Luminous flux output P1: Luminous flux output P2: LED color temp. (CCT):	1229 Im 2340 Im 2700 K, 3000 K, 4000 K RA min. 90 -	1391 lm 2650 lm 2700 K, 3000 K, 4000 K RA min. 90 -	1523 Im 2900 Im 2700 K, 3000 K, 4000 K RA min. 90 -	1838 lm 3500 lm 2700 K, 3000 K, 4000 K RA min. 90 -	2100 lm 4000 lm 2700 K, 3000 K, 4000 K RA min. 90 -
LED positioning:	R9 min. 50 One or two sides	R9 min. 50 One or two sides			
GENERAL SPECS.					
Mounting: Environment of use: Estimated LED Lifespan:	Ceiling lamp Indoor 50,000 hours	Ceiling lamp Indoor 50,000 hours	Ceiling lamp Indoor 50,000 hours	Ceiling lamp	Ceiling lamp

2 years

2 years


2 years



# LINE CEILING



### SIZES AND FINISHES

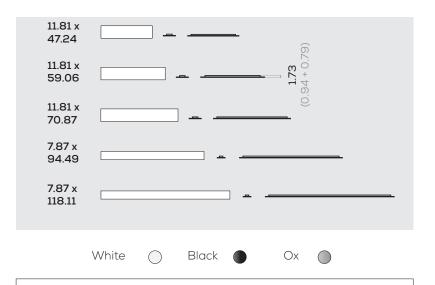


Available on request in different sizes and special finishes.

Product code see Line brochure pag. 25

#### **TECHNICAL DESCRIPTION**

Line is the series of FOLIO® products of rectangular shape, with a thickness of 0.94 in and width between 3.94 in and 11.81 in, elegant and graceful even with a length of 118.11 in LED panels with microprism laser incision, 0.39 in opal diffuser (PMMA) and 16mm aluminum case. Single or double LED installed along the length of the panel.

## POLAR DIAGRAM [cd/klm]



#### **APPLICATIONS**





sales@illumco.com

Cifralluminio Srl | Italia | 25135 Brescia | Via R.Gessi 10 | T +39 030 3363047 | F +39