


The Hatbox Series is available in Round / HR, Rectangular/ HRE, Square/ HS and Oval/ HO shapes. The Series is available in a variety of stem options and square or round wall sconces.

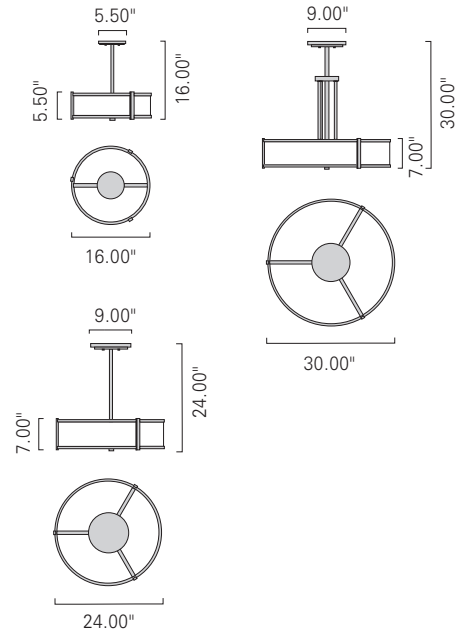

**LED** **IN** **CFL**

UL/ETL Listed

Product Name / Model / Dimensions			Mounting Options	Diffuser Options	Finish Options	Lamping Options
Hatbox 16" Round Pendant / HRP16			<b>Standard</b> Single Stem / SS	<b>Standard</b> Shiny Opal Acrylic / AC  <b>Fabric Diffuser</b> Navy Blue / NB Burlap White / BW Textured White / TW Textured Cream / TC	<b>Standard</b> Architectural Bronze Powder Coat / ABPC Architectural Bronze / AB Polished Brass / PB Satin Brass / SB  <b>Premium</b> Brushed Nickel / BN Polished Nickel / PN	<b>Standard</b> LED / LED 5200lm, 3000K CCT, 80 CRI 42 Watts, 120-277v, 0-10VDC Dimming, 1% Incandescent / IN (2) 60W max candelabra  <b>Optional</b> Fluorescent / FL (2) CFTR 26W GX24q-3 120v
Diameter	Body Height	OA Height				
16.00"	5.50"	16.00"				
canopy 5.50"						
Hatbox 24" Round Pendant / HRP24			<b>Standard</b> Single Stem / SS  <b>Optional</b> Triple Stem / TS	<b>Standard</b> Shiny Opal Acrylic / AC  <b>Fabric Diffuser</b> Navy Blue / NB Burlap White / BW Textured White / TW Textured Cream / TC	<b>Standard</b> Architectural Bronze Powder Coat / ABPC Polished Brass / PB Satin Brass / SB  <b>Premium</b> Architectural Bronze / AB Brushed Nickel / BN Polished Nickel / PN	<b>Standard</b> LED / LED 7000lm, 3000K CCT, 80 CRI 62 Watts, 120-277v, 0-10VDC Dimming, 1% Incandescent / IN (4) 60W max candelabra  <b>Optional</b> Fluorescent / FL (4) CFTR 26W GX24q-3 120v
Diameter	Body Height	OA Height				
24.00"	7.00"	24.00"				
canopy 9.00"						
Hatbox 30" Round Pendant / HRP30			<b>Standard</b> Double Stem / DS  <b>Optional</b> Triple Stem / TS	<b>Standard</b> Shiny Opal Acrylic / AC  <b>Fabric Diffuser</b> Navy Blue / NB Burlap White / BW Textured White / TW Textured Cream / TC	<b>Standard</b> Architectural Bronze Powder Coat / ABPC Polished Brass / PB Satin Brass / SB  <b>Premium</b> Architectural Bronze / AB Brushed Nickel / BN Polished Nickel / PN	<b>Standard</b> LED / LED 11200lm, 3000K CCT, 80 CRI 92 Watts, 120-277v, 0-10VDC Dimming, 1% Incandescent / IN (6) 60W max candelabra  <b>Optional</b> Fluorescent / FL (6) CFTR 26 or 30W GX24q-3 120v
Diameter	Body Height	OA Height				
30.00"	7.00"	30.00"				
canopy 9.00"						