BEAUBIEN 05



Type Suspension

Materials Body: powder coated aluminium or brass

Hardware: brass

Sphere: milk glass (G50-G80)
Canopy: powder coated steel or brass

Total Height Height to be specified upon order

Weight 6lb / 2.7kg

Light Bulb LED (included), 1 x 4.5W + 7 x 3.5W

Sockets G9

Voltage 120V / 240V

Dimmer Refer to our recommended list of dimmer models


Certifications () CE


Notes • Must be installed by an electrician


Additional charges for modifications

• Lead time between 7–9 weeks


• Dimensions are approximate and may vary slightly

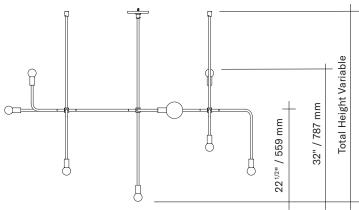






ORDER GUIDE: SKU

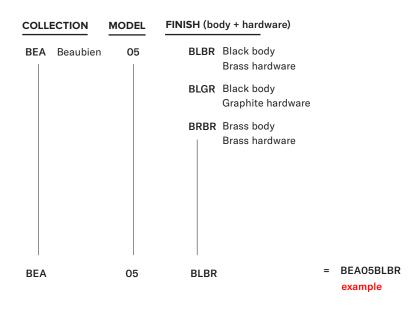



Finish





Flat black



Brass

Graphite


Canopy

Swivel option for slanted ceiling




LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS




Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



\bigcirc	G80	Ø ±3"/80 mm
	G50	Ø ±2"/50 mm









DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.



BEAUBIEN 06



Type Suspension

Materials Body: powder coated aluminium or brass

Hardware: brass

Sphere: milk glass (G50-G80)
Canopy: powder coated steel or brass

Total Height Height to be specified upon order

Weight 12lb / 5.4kg

Light Bulb LED (included), 2 x 4.5W + 8 x 3.5W

Sockets G9

Voltage 120V / 240V

Dimmer Refer to our recommended list of dimmer models


Certifications


Notes • Must be installed by an electrician


Additional charges for modifications

· Lead time between 7-9 weeks

• Dimensions are approximate and may vary slightly

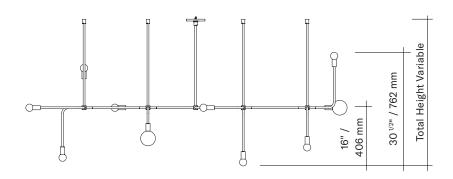




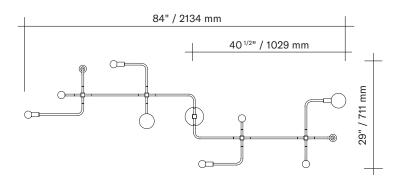



ORDER GUIDE: SKU

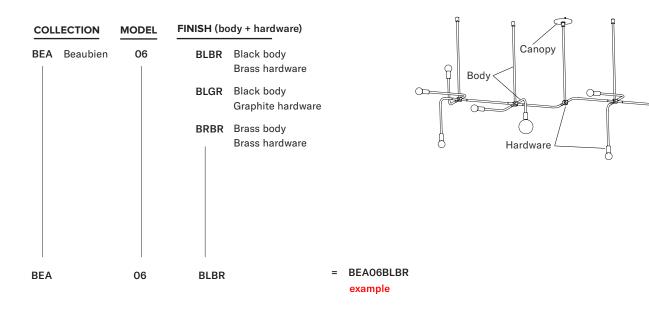

Finish







Flat black


Canopy

Swivel option for slanted ceiling




LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS




Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



SPHERES









DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	anad
LUTRON - SKYLARK	SELV-300P	100%	0%	no	good very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.

BEAUBIEN 07



Type Suspension

Materials Body: powder coated aluminium or brass

Hardware: brass

Sphere: milk glass (G50-G80)
Canopy: powder coated steel or brass

Total Height Height to be specified upon order

Weight 24 lb / 10.8 kg

Light Bulb LED (included), 2 x 4.5W + 10 x 3.5W

Sockets G9

Voltage 120V / 240V

Dimmer Refer to our recommended list of dimmer models


Certifications CE


Notes • Must be installed by an electrician


Additional charges for modifications

· Lead time between 7-9 weeks

• Dimensions are approximate and may vary slightly

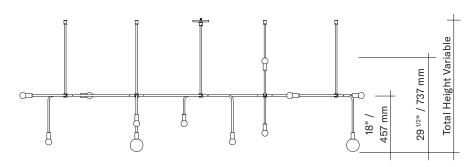




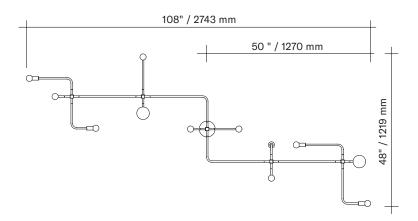



ORDER GUIDE: SKU

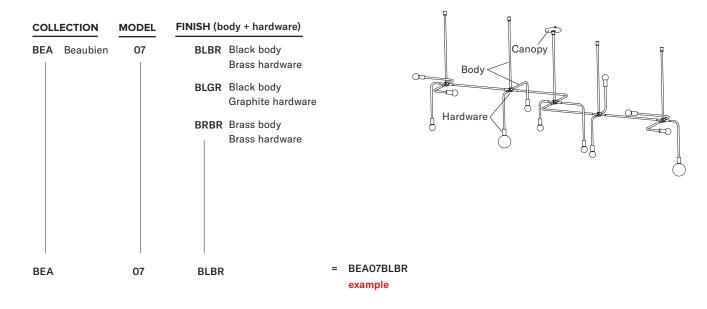

Finish







rass

Graphite


Canopy

Swivel option for slanted ceiling




LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS




Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



G80	Ø ±3" / 80 mm
G50	Ø ±2" / 50 mm









DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.