lambert&fils

DOT ATOMIUM



type suspension

body: materials brass

sphere: milk glass (G50)

hardware: brass

total height 24 1/2" 30 1/2" 36 1/2" 42 1/2" 54 1/2" 622mm | 775 mm | 927mm | 1080mm | 1384mm

min. 5.5 lb / 2.5 kg - max. 6 lb / 2.7 kg weight (min.)

light bulb LED (included), 12x 3.5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models


certifications CULUS CE

notes - must be installed by an electrician;

> - additional charges for modifications or for special orders;

lead time between 7-9 weeks;

- dimensions are approximate and may vary slightly.

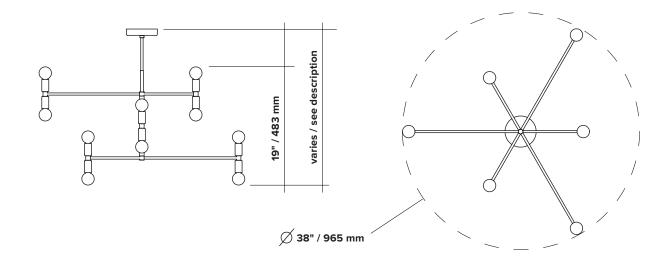



lambert&fils

ORDER GUIDE: SKU

COLLECTION		MODEL		FINISH		HEIGHT	canopy		
DOT	Dot	01	BR	brass	A	24 ½" / 622 mm			
			GR	graphite	В	30 ½" / 775 mm	body		
					С	36 ½" / 927 mm			
					D	42 ½" / 1080 mm			
					E	54 ½" / 1384 mm			
					٧	custom			
							sphere		
DOT		01	BR		A	= DOT01BRA example	8		

FINISH



CANOPY swivel option for slanted ceiling




lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS

SPHERES



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty

G5

0 Ø ±2" / 50 mm





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommand conducting your own test before final installation.

