## lambert&fils

## **DOT - LINE WALL**



wall type

brass (BR) or materials body:

powder coated aluminium (BL/WH)

hardware: brass

sphere: milk glass (G50) canopy: brass (BR) or

powder coated steel (BL/WH)

wire wire: vinyl

weight 1.8 lb / 0.8 kg

light bulb LED (included), 5x 3,5W

sockets G9

voltage 120V / 240V

dimmer hardwire installation only

refer to our recommended list of dimmer models

certifications

- must be installed by an electrician (HW) notes


- canopy position must be determined by client

– lead time between 7-9 weeks


- dimensions are approximate and may vary


slightly






# lambert&fils

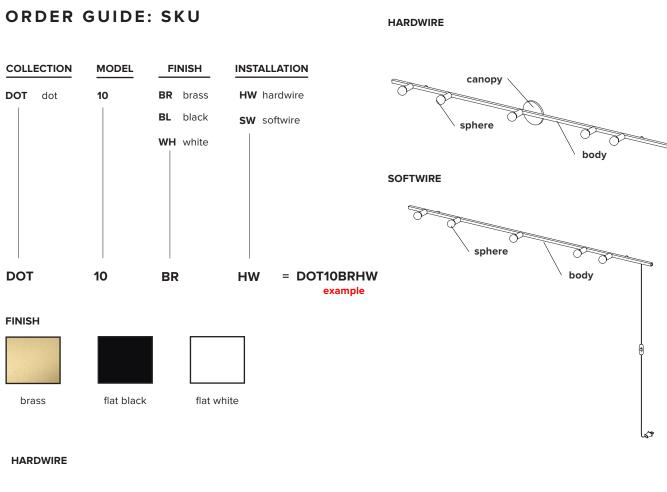

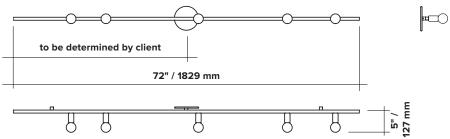

## **SOFTWIRE**

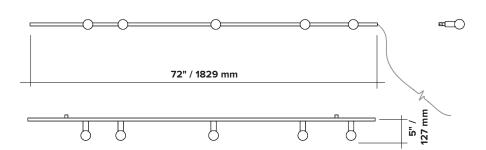




## lambert&fils

## LIGHT BULB & DIMMER SPECIFICATIONS

### **G9 SOCKETS**

#### **SPHERES**



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty

$\bigcirc$	G50	Ø ±2"/50	m
$\bigcirc$	G50	Ø ±2"/50	r





## **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

## **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V**

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

<sup>\*</sup>Other dimmers can yield good results and we recommend conducting your own test before final installation.

