## lambert&fils

### WALDORF SUSPENSION DOUBLE



type suspension

materials shade: powder coated steel

& aluminium

body: powder coated aluminium

sphere: milk glass (G60)

hardware: brass

canopy: powder coated steel

 total height
 24"
 28"
 32"
 36"
 42"
 54"

 610 mm
 711 mm
 813 mm
 914 mm
 1067 mm
 1372 mm

weight min. 3.5 lb / 1.6 kg - max. 3.7 lb / 1.7 kg

light bulb LED (included), 2x 4.5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models


certifications □ □ C € ⊕

**notes** – must be installed by an electrician;

additional charges for modifications or for special orders;

lead time between 8-9 weeks;

– dimensions are approximate and may vary slightly.

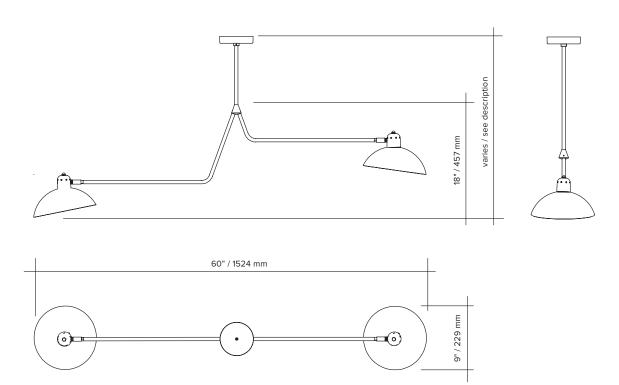




# lambert&fils

### **ORDER GUIDE: SKU**


| COLLECTION         | MODEL | FINISH (shade and body, hardware) |  | HEIGHT |               |                    |
|--------------------|-------|-----------------------------------|--|--------|---------------|--------------------|
| <b>WAL</b> waldorf | 08    |                                   | plack shade and body,<br>prass hardware    | Α      | 24" / 610 mm  |                    |
|                    |       |                                   | brass riaraware                            | В      | 28" / 711 mm  |                    |
|                    |       |                                   | plack shade and body,<br>graphite hardware | С      | 32" / 813 mm  |                    |
|                    |       |                                   | white shade and body,<br>brass hardware    | D      | 36" / 914 mm  |                    |
|                    |       | <br>                              |  | E      | 42" / 1067 mm |                    |
|                    |       |                                   |  | F      | 54" / 1372 mm |                    |
|                    |       |                                   |  | V      | custom        |                    |
|                    |       |                                   |  |        |               |                    |
| WAL                | 08    | BLBR                              |  | A      | =             | WAL08BLBRA example |

### **FINISH**



# CANOPY swivel option for slanted ceiling





## lambert&fils

### LIGHT BULB & DIMMER SPECIFICATIONS


### **G9 SOCKETS**



2700 K 25 000 H CRI ≥80

2 years warranty

### **SPHERES**







### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| DIMMER BRAND     | MODEL NUMBER   | MAX LEVEL | MIN LEVEL | FLICKERING | OVERALL QUOTE |
|------------------|----------------|-----------|-----------|------------|---------------|
| LUTRON - MAESTRO | MAELV-600      | 100%      | 0%        | 0%-10%     | good          |
| LUTRON - SKYLARK | SELV-300P      | 100%      | 0%        | no         | very good     |
| LUTRON - SKYLARK | SELV-303P      | 100%      | 0%        | no         | very good     |
| LUTRON - SKYLARK | CTELV-303P     | 100%      | 0%        | no         | very good     |
| LUTRON - DIVA    | DVELV-300P     | 100%      | 0%        | no         | very good     |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 100%      | 30%       | no         | good          |

### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V**

| DIMMER BRAND    | MODEL NUMBER | MAX LEVEL | MIN LEVEL | FLICKERING | OVERALL QUOTE |
|-----------------|--------------|-----------|-----------|------------|---------------|
| VARILIGHT       | V-PRO        | 100%      | 2%        | no         | very good     |
| LEGRAND - NILOÉ | 3 996 35     | 87%       | 15%       | no         | good          |
| NIKO            | 310-0280X    | 94%       | 5%        | no         | very good     |
| NIKO            | 310-0190X    | 100%      | 1%        | no         | very good     |

<sup>\*</sup>Other dimmers can yield good results and we recommend conducting your own test before final installation.

