



LED Dandelion

by Burkhard Dämmer

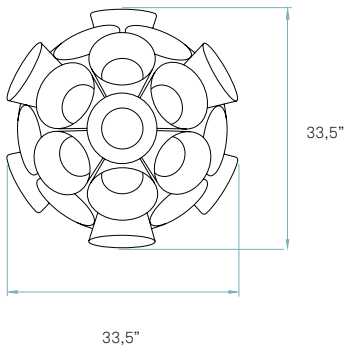

References

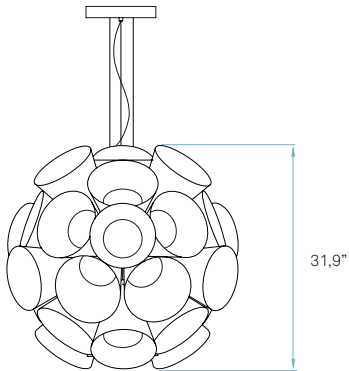

DDLN S LED DIM0-10V UL



120V - 277V

Certificates

Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate

Components



Metal canopy
Brushed Nickel
ø 11"



Diffuser
Matt satin acrylic

Electrical cable
Transparent 8 ft drop



Required
Shade mount required
Difficulty: ****



Steel cable
3 x 8 ft drop



COB
31 x 4 W 135 mA

LED integrated
Not replaceable

**Driver**

MEANWELL
2 units - Ref. NPF 60D-30

Driver housed in canopy.

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime
120V-277V	3362 lm	90	120 W	3000	

* Measurements taken using white shades, Ve

illuminations

425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com