




References



NWAV S LED DIM UL

Certificates



120 - 277V



Wood shade colors

Exterior & Interior

26 Red / 24 Yellow

or

Exterior & Interior

30 Turquoise / 24 Yellow

or

Exterior & Interior

28 Blue / 24 Yellow

or

Exterior & Interior

21 Cherry / 20 White

If you would like any other colour combinations please consult with our offices.



REF. NWAV S LED 28-24  
New Wave

Awards



Chicago 2018

Components




**Metal canopy**  
Brushed Nickel  
14 x 4,6 x 2"

**Electrical cable**  
Transparent 8 ft drop



**Steel cable**  
4 x 8 ft drop


Packaging



**Box size**  
48 x 12 x 13"

**Box volume**  
4,5 ft³

**Weight**  
Gross - 13,2 Lb  
Net - 6,2 Lb

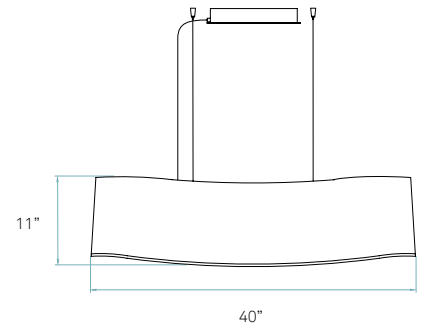

**Linear Module**  
2 x 5,5 W 350mA (Be sure to specify the LED color temperature)  
2700 K / 4000 K




**Driver**



**EFORE**  
1 unit - Ref. RCL015-0440A  
Driver housed in canopy.

Compatible with TRIAC / ELV (only 120V) and 0-10V (120-277V)



Details



Input Voltage	Watt.	CCT	Luminous Flux *	CRI	Lifetime (L70)
120 - 277V	16 W	2700 K	726 lm	90	40000h
		4000 K	840 lm		

\* Measurements taken using Blue exterior & Yellow interior shades, Veneer Ref: 28 Blue & 24 Yellow

**New Wave**  
by Ray Power



REF. NWA S 26-24  
New Wave

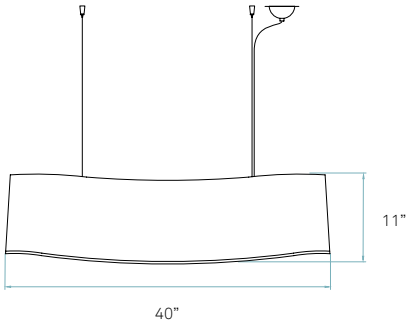

References



NWAV S E26 UL  
NWAV S GU24 UL

Awards



Chicago 2018

Certificates



120 - 277V



Wood shade colors

Exterior & Interior



26 Red / 24 Yellow  
or

Exterior & Interior



30 Turquoise / 24 Yellow  
or

Exterior & Interior



28 Blue / 24 Yellow  
or

Exterior & Interior



21 Cherry / 20 White

If you would like any other colour combinations please consult with our offices.

Components



**Metal canopy**  
Brushed Nickel  
ø 3,9" - disc ø 5,5"

**Electrical cable**  
Transparent 8 ft drop



**Steel cable**  
4 x 8 ft drop

Packaging



**Box size**  
48 x 12 x 13"

**Box volume**  
4,5 ft<sup>3</sup>

**Weight**  
Gross - 10,8 Lb  
Net - 4,2 Lb

Recommended bulbs (Not Included)



E26 Medium Base



CFL Mini Globe  
2 x 11 W max



LED A19  
2 x 15 W max



GU24



CFL Mini Globe  
2 x 11 W max



LED A19  
2 x 15 W max