



# Vasi 21473-36

project name:

project location:

specifier name:

specifier location:

quantity:

fixture type:

modifications:

### Base Specs

36" dia x 6.75" h x 24" - 120" adj OAH  
Cable Hung

### Notes


- Shown in: Smoked Silver / Opal

### Multiple Sizes Available

21473-36 | 36" dia x 6.75" h x 24" - 120" adj OAH

21473-60 | 60" dia x 10.25" h x 24" - 120" adj OAH

*Find full specifications and options on individual spec sheets.*

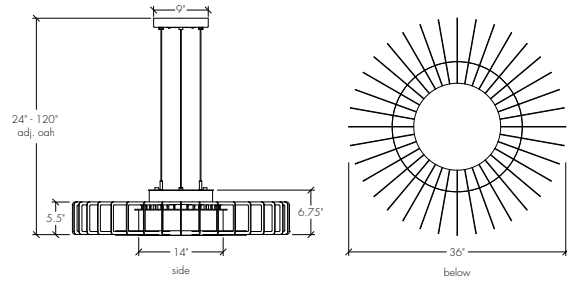



# Vasi 21473-36

finish:

- BA - Bronze Age
- BK - Black
- BP - Black Pearl
- CB - Cast Bronze
- CH - Chestnut
- DI - Dark Iron
- EB - Empire Bronze
- MB - Medieval Bronze
- NB - New Brass
- SB - Smokey Brass
- SP - Satin Pewter
- SS - Smoked Silver
- WH - White

diffuser:

- OA - Opal Acrylic

lampping:

- 04: 38.12W Integrated LED, 5870 Initial Lumens, 3000K, 80 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp, powered cable system  
*Alternative color temperatures and CRI options available — Inquire.*
- 14: 33.6W Integrated LED, 4724 Initial Lumens, 3000K, 80 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp  
*Alternative color temperatures and CRI options available — Inquire.*

mounting:

- Cable Hung (standard)
- Stem Mount — Specify OAH
- Semi-Flush Mount
- Sloped Ceiling Adaptable — Inquire.





# Vasi 21473-60

project name:

project location:

specifier name:

specifier location:

quantity:

fixture type:

modifications:

### Base Specs

60" dia x 10.25" h x 24" - 120" adj OAH  
Cable Hung

### Notes


- Shown in: Chestnut / Opal

### Multiple Sizes Available

21473-36 | 36" dia x 6.75" h x 24" - 120" adj OAH

21473-60 | 60" dia x 10.25" h x 24" - 120" adj OAH

*Find full specifications and options on individual spec sheets.*

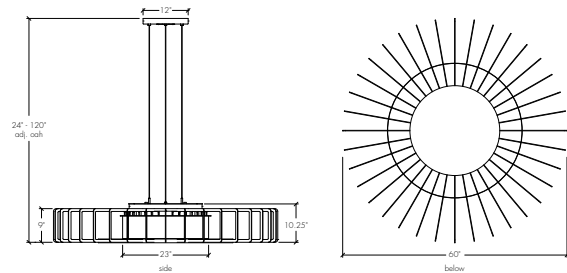



# Vasi 21473-60

finish:

- BA - Bronze Age
- BK - Black
- BP - Black Pearl
- CB - Cast Bronze
- CH - Chestnut
- DI - Dark Iron
- EB - Empire Bronze
- MB - Medieval Bronze
- NB - New Brass
- SB - Smokey Brass
- SP - Satin Pewter
- SS - Smoked Silver
- WH - White

diffuser:

- OA - Opal Acrylic

lampping:

- 04: 56W Integrated LED, 8624 Initial Lumens, 3000K, 80 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp, powered cable system  
*Alternative color temperatures and CRI options available — Inquire.*
- 14: 50.4W Integrated LED, 7086 Initial Lumens, 3000K, 80 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp  
*Alternative color temperatures and CRI options available — Inquire.*

mounting:

- Cable Hung (standard)
- Stem Mount — Specify OAH
- Semi-Flush Mount
- Sloped Ceiling Adaptable — Inquire.

