

Flamingo

Design by Antoni Arola.

Reference

1570.

Application

Pendants

Installation type

Surface mounted

Description

Hanging lamp designed for large and high ceiling spaces. A large light chandelier with a contemporary sculptural quality where floating circles of light generate a luminous ambiance.

Diffuser

PMMA diffuser

Materials

LED support: Aluminum

Shade: Acrylic

Rods: Steel

Canopy: Steel


Finishes

 **1570-18** Graphite (Flamingo RAL 7016)

 **1570-20** Gold (Flamingo gold)

 **1570-93** White (Flamingo RAL 9016)

Sketch

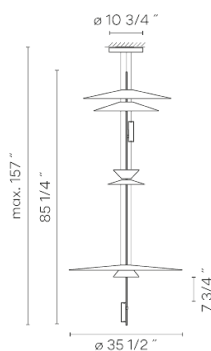

Electrical characteristics

4 x LED 5.6W 500mA

AND

4 x LED 5.6W 500mA



Total 44.8 W



VIBIA



Light source: 2700K CRI >90 2777.68 lm 124 lm/W

Fixture: 2219.88 lm 124.22 lm/W

Driver included: CC - Constant Current 1000 mA 120~277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI or Lutron ECO

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 100%

Coordinate system : CG

Total flux : 2219.88 lm

Maximum value : 1503.18 cd

Light position : C=0.00 G=10.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates





425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com