

FUNNEL

Design by Ramón Benedito.

VIBIA

Reference

2004.

Application

Ceiling Fixtures

Installation type

Surface mounted

Description

Light for ceiling or wall fitting. It gives an indirect light which is ideal for creating a cozy atmosphere in any room. Non-dazzle.

Diffuser

Aluminum diffuser


Materials

Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel

Finishes

-  **2004-10** White (NCS S 0300-N)
-  **2004-36** Soft Pink (NCS S 1010-Y50R)
-  **2004-47** Green L1 (NCS S 4005-G80Y)

Sketch



Fixture: 635 lm 7 lm/W

Driver included: 120V 60Hz

Electronic dimming: NO DIMMING


Installation and assembly

Please see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 3%

Total flux : 1960.00

Maximum value : 121.50


Light position : C=90.00 G=115.00

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

Symmetry on the planes : Double symmetrical

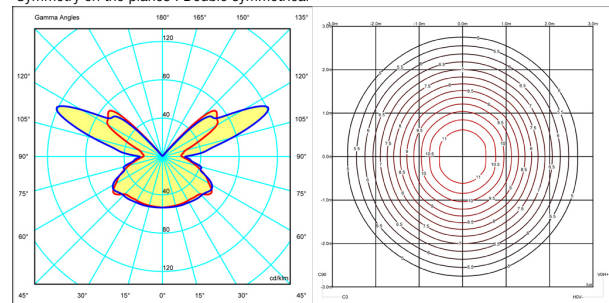

Certificates



Electrical characteristics

2 x T-4 G9 Frosted 120V 40W Max

Total 80.0 W




425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com

FUNNEL

Design by Ramón Benedito.

Reference

2007.

Application

Ceiling Fixtures

Installation type

Surface mounted

Description

Light for a ceiling, a streamlined funnel-shaped base that flows into a protruding cap. It gives an indirect light which is ideal for creating a cozy atmosphere in any room. Non-dazzle.

Diffuser

Glass diffuser

Materials

Shade: Aluminum

Reflector: Aluminum

Wall plate: Steel


Finishes

 **2007-10** White (NCS S 0300-N)

 **2007-36** Soft Pink (NCS S 1010-Y50R)

 **2007-47** Green L1 (NCS S 4005-G80Y)

Sketch



Electrical characteristics

3 x T-3 RSC 3 1/8" 120V 100W Max

Total 300.0 W



VIBIA



Fixture: 2503 lm 8 lm/W

Driver included: 120V 60Hz

Electronic dimming: NO DIMMING


Installation and assembly

Please see the installation manual

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 3%

Total flux : 4350.00

Maximum value : 92.35

Light position : C=60.00 G=115.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

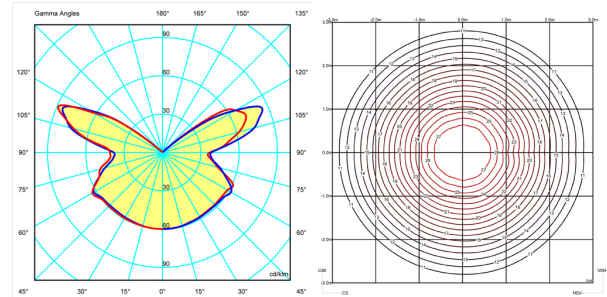

Certificates




425 Peachtree Hills Ave. NE #3 Atlanta, GA 30305
404.876.1064 sales@illumco.com

FUNNEL

Design by Ramón Benedito.

Reference

2012.

Application

Wall Fixtures

Installation type

Surface mounted

Description

Light for ceiling or wall fitting. It gives an indirect light which is ideal for creating a cozy atmosphere in any room. Non-dazzle.

Diffuser

Aluminum body

Materials

Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel


Finishes

 **2012-10** White (NCS S 0300-N)

 **2012-36** Soft Pink (NCS S 1010-Y50R)

 **2012-47** Green L1 (NCS S 4005-G80Y)

Sketch




Electrical characteristics

1 x LED PLATE 6.3W 350mA

Total 6.3 W



VIBIA



Light source: 2700K CRI >80 632 lm 100 lm/W

Fixture: 420 lm 67 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming: NO DIMMING


Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

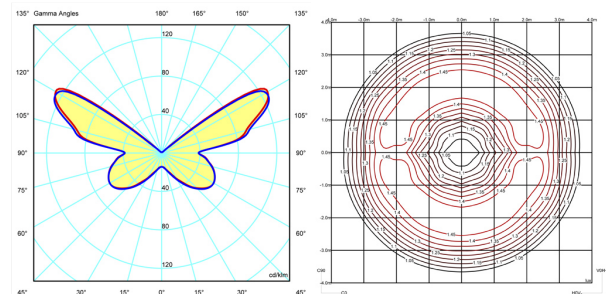

Certificates



FUNNEL

Design by Ramón Benedito.

Reference

2013.

Application

Wall Fixtures

Installation type

Surface mounted

Description

Light for ceiling or wall fitting. It gives an indirect light which is ideal for creating a cozy atmosphere in any room. Non-dazzle.

Diffuser

Polycarbonate diffuser

Materials

Shade: Aluminum

Reflector: Aluminum

Wall plate: Steel


Finishes

 **2013-10** White (NCS S 0300-N)

 **2013-36** Soft Pink (NCS S 1010-Y50R)

 **2013-47** Green L1 (NCS S 4005-G80Y)

Sketch




Electrical characteristics

6 x LED 4.5W 700mA

Total 27.0 W



VIBIA



Light source: 2700K CRI >80 2941 lm 108 lm/W

Fixture: 2336 lm 85 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: TRIAC

Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

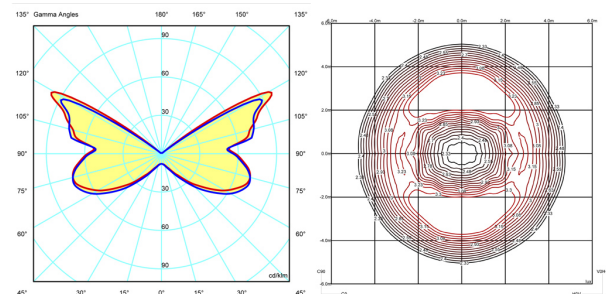

Certificates

