Origami



References:

4500 / 4501.

Application:


Wall fixtures / Outdoor.

Installation type:

Surface.

Description:

With just two pieces you can create artistic layouts on the wall. With a single power connection point and no need for insetting, with Origami you can create whatever light murals you want, with adjustable brightness.

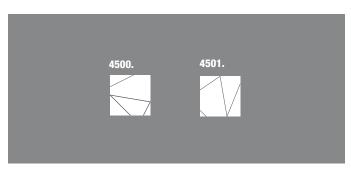



Diffuser:

Polycarbonate diffuser.

Finish:







White matte lacquer.

4500-03 / 4501-03. 4500-07 / 4501-07. 4500-54 / 4501-54. Oxide green matte lacquer.

Oxide matte lacquer.

Installation and assembly:

A maximum of 30 pieces can be connected to a single connection point. For bigger compositions, check connection system.

Design your product configurations fast online at

www.vibia.com ▶ create your project ▶ origami

and together with the product you'll receive a PERSONALIZED INSTALLATION GUIDE with all the details of your composition and guidance for its correct and easy installation.



Light distribution:

General indirect lighting: Fixture designed with obscured light source providing indirect ambient illumination



Certificates:







IP65 ADA WET LOCATION





Origami Design by Ramón Esteve.





4500.

1 x LED STRIP 120V 6.5W 350mA

LED Included

120V TRIAC ELECTRONIC DIMMING DRIVER (Leading and trailing edge)

Physical characteristics: 1 Carton/13.78"x13.78"x4.72"/ Vol. 0.53 ft³/Weight 3.30 lb.

4501.

1 x LED STRIP 120V 6.5W 350mA

LED Included

120V TRIAC ELECTRONIC DIMMING DRIVER (Leading and trailing edge)

Physical characteristics: 1 Carton/13.78"x13.78"x4.72"/ Vol. 0.53 ft³/Weight 3.30 lb.



USA & CANADA **VIBIA, INC.**

272 Fernwood Ave. Edison, NJ 08837. USA. Phone 732 417 1700. Fax 732 417 1701 sales@vibialight.com www.vibia.com



Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973. grupo-t@grupo-t.com www.vibia.com





ORIGAMI

Design by Ramón Esteve.



Reference

4504.

Application

Wall Fixtures

Installation type

Surface mounted

Description

ORIGAMI blends light functionality with an opportunity for artistic creation. With the new express clusers, designers can more easily create wall sconce patterns with 2, 3, or 4 piece preset configurations. ORIGAMI is LED and requires only one powerfeed for each cluster, and is also rated for outdoor and wet locations. Available in white matte, oxide-green or oxide matte lacquer finish options.

Diffuser

Polycarbonate diffuser

Materials


Shade: ABS

Finish



4504-03 White matte lacquer (RAL 9016)

Sketch



Electrical characteristics

2 x LED STRIP 6.3W 350mA



Total 12.6 W







Led 2700K CRI >80 1512 lm 120 lm/W

Fixture: 854 lm 62 lm/W

Driver included: CC - Constant Current 350 mA 120V 50/60Hz

Electronic dimming: TRIAC

Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.







Certificates











ORIGAMI

Design by Ramón Esteve.

Reference

4506.

Application

Wall Fixtures

Installation type

Surface mounted

Description

ORIGAMI blends light functionality with an opportunity for artistic creation. With the new express clusers, designers can more easily create wall sconce patterns with 2, 3, or 4 piece preset configurations. ORIGAMI is LED and requires only one powerfeed for each cluster, and is also rated for outdoor and wet locations. Available in white matte, oxide-green or oxide matte lacquer finish options.

Diffuser

Polycarbonate diffuser

Materials

Shade: ABS

Finish




4506-03 White matte lacquer (RAL 9016)



4506-54 Oxide lacquer (RAL 8019)

Sketch



Electrical characteristics

3 x LED STRIP 6.3W 350mA



Total 18.9 W







Led 2700K CRI >80 2269 lm 120 lm/W

Fixture: 1313 lm 63 lm/W

Driver included: CC - Constant Current 350 mA 120V 50/60Hz

Electronic dimming: TRIAC

Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.







Certificates







Dimmable , WET LOCATION ADA





ORIGAMI

Design by Ramón Esteve.



Reference

4508.

Application

Wall Fixtures

Installation type

Surface mounted

Description

ORIGAMI blends light functionality with an opportunity for artistic creation. With the new express clusers, designers can more easily create wall sconce patterns with 2, 3, or 4 piece preset configurations. ORIGAMI is LED and requires only one powerfeed for each cluster, and is also rated for outdoor and wet locations. Available in white matte, oxide-green or oxide matte lacquer finish options.

Diffuser

Polycarbonate diffuser

Materials

Shade: ABS

Finish




4508-03 White matte lacquer (RAL 9016)



4508-54 Oxide lacquer (RAL 8019)

Sketch



Electrical characteristics

4 x LED STRIP 6.3W 350mA



Total 25.2 W

A⁺





Led 2700K CRI >80 3025 lm 120 lm/W

Fixture: 1740 lm 63 lm/W

Driver included: CC - Constant Current 350 mA 120V 50/60Hz

Electronic dimming: TRIAC

Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.







Certificates









