## $\langle \langle \rangle \rangle$

### 0299


Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet







Optional: Extra cable length Min. Quantity, upcharge and extra lead time apply

Finish	O4 Black RAL 9005	Lighting effect
		General Lighting
LED color temperature	2700 K	Lamp for general lighting that equally distributes the light in all directions.
Dimming	0-10V <b>Optional</b> DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply	
Installation type	Surface	Photometric Data
Materials	Canopy: Steel Rods: Steel Body: Aluminum	Total Flux O Maximum Value O
Light source	8 x LED 4.5W 700mA	
LED	CRI>90 3922.2 lm 108 2700 K	
Driver	CC - Constant Current 700 120~277 V 50/60 HZ	
Remarks	Cable can be adjusted in the field. 157 max. Type Dimmable LED [P20] Multi-volt @m Dry Location 50-60Hz _0-10V	
Application	Pendants	
Packaging	2 Box 64.29 m x 63.74 m x 3.39 m Gross weight 39.43 Net weight 35.48 Vol. 11.4597	

# .....


## $\langle | \land \rangle$

### 0300

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet

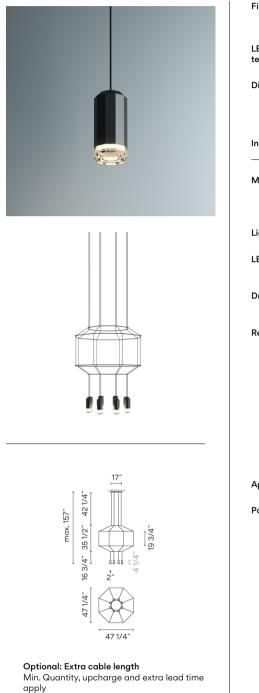

Finish	O4 Black RAL 9005	Lighting effect
		General Lighting
LED color temperature	2700 К	Lamp for general lighting that equally distributes the light in all directions.
Dimming	0-10V <b>Optional</b> DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply	
Installation type	Surface	Photometric Data
Materials	Canopy: Steel Rods: Steel Body: Aluminum	Total Flux O Maximum Value O
Light source	8 x LED 4.5W 700mA	
LED	CRI>90 3922.2 lm 108.95 2700 K	
Driver	CC - Constant Current 700 120~277 V 50/60 HZ	
Remarks	Cable can be adjusted in the field. 157 max. Imax.   Imax.   Imax.	
Application	Pendants	
Packaging	2 Box 64.29 m x 63.74 m x 3.39 m Gross weight 39.43 Net weight 35.48 Vol. 11.4597	

## 


## $\langle \langle \rangle \rangle$

### 0301

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet

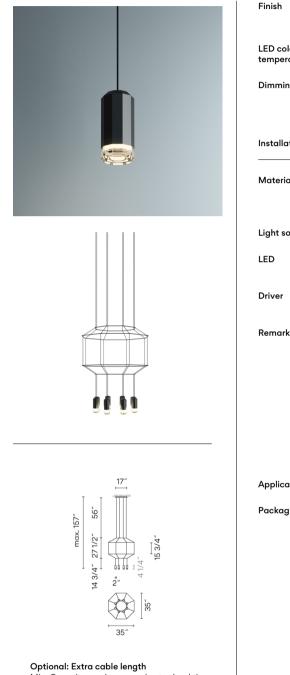

Min. Quantity, upcharge and extra lead time apply

Finish	04 Black	Lighting effect
	RAL 9005	General Lighting
LED color temperature	2700 K	Lamp for general lighting that equally distributes the light in all directions.
Dimming	0-10V Optional DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply	
Installation type	Surface	Photometric Data
Materials	Canopy: Steel Rods: Steel Body: Aluminum	Total Flux O Maximum Value O
Light source	8 x LED 4.5W 700mA	
LED	CRI>90 3922.2 lm 108 2700 K	
Driver	CC - Constant Current 700 120~277 V 50/60 HZ	
Remarks	Cable can be adjusted in the field. 157 max. To To Dimmable LED [IP20] Multi-volt control 50-60Hz -00-10V	
Application	Pendants	
Packaging	2 Box 45.59 m x 44.61 m x 3.39 m Gross weight 33.04 Net weight 29.74 Vol. 7.4162	

## Ш


## $/ | \overline{\beta} | \wedge$

### 0302

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet

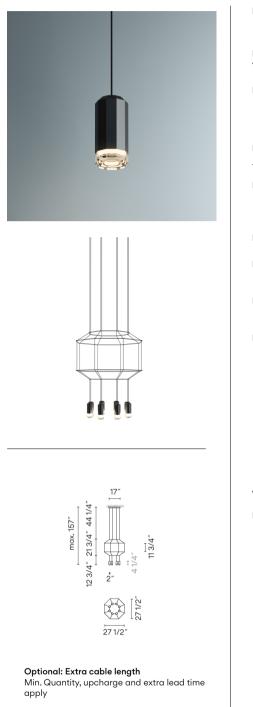

Finish	O4 Black RAL 9005	Lighting effect
	• RAE 3000	General Lighting
LED color temperature	2700 К	Lamp for general the light in all dire
Dimming	0-10V Optional DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply	
Installation type	Surface	
Materials	Canopy: Steel Rods: Steel Body: Aluminum	Photometric Dato Total Flux Maximum Value
Light source	8 x LED 4.5W 700mA	
LED	CRI>90 3922.2 lm 108 2700 K	
Driver	CC - Constant Current 700 120~277 V 50/60 HZ	
Remarks	Cable can be adjusted in the field. 157 max. IP20 Multi-volt cm Dry Location 50-60Hz C0-10V	
Application	Pendants	
Packaging	2 Box 23.62 m x 23.62 m x 10.63 m Gross weight 27.53 Net weight 24.78 Vol. 5.5021	

### amp for general lighting that equally distributes e light in all directions.

hotometric Data

otal Flux laximum Value 0 0


## $\left|\right\rangle$

### 0303

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet

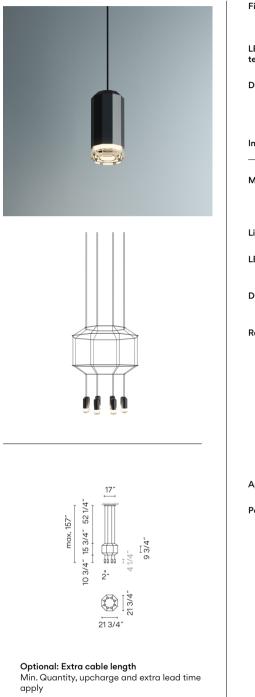

O4 Black RAL 9005	Lighting effect
	General Lighting
2700 К	Lamp for genero the light in all di
0-10V <b>Optional</b> DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply	
Surface	
	Photometric Da
Canopy: Steel Rods: Steel Body: Aluminum	Total Flux Maximum Value
8 x LED 4.5W 700mA	
CRI>90 3922.2 lm 108 2700 K	
CC - Constant Current 700 120~277 V 50/60 HZ	
Cable can be adjusted in the field. 157 max. T/ Dimmable LED [IP20] Multi-volt @ [Ury Location] 50-60Hz _0-10V	
Pendants	
2 Box 23.62 m x 23.62 m x 10.63 m Gross weight 27.09 Net weight 24.16 Vol. 5.5021	
	RAL 9005     2700 K     O-10V     Optional   DALI or Lutron ECO     Min. Quantity, upcharge and extra lead time apply     Surface     Canopy: Steel     Rods: Steel     Body: Aluminum     8 x LED 4.5W 700mA     CRI>90 3922.2 lm 108     2700 K     CC - Constant Current 700     120-277 V 50/60 HZ     Cable can be adjusted in the field.     157     max.          Cable can be adjusted in the field.     157     max.          Pendants     2 Box     23.62 m x 23.62 m x 10.63 m     Gross weight 27.09     Net weight 24.16

#### eneral Lighting amp for general lighting that equally distributes ne light in all directions.



hotometric Data

otal Flux Aaximum Value 0 0

## $/ | \overline{\beta} | \wedge$


### 0309

Design By Arik Levy


Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet





Finish	04 Black RAL 9005
LED color temperature	2700 K
	0-10V Optional DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply
Installation type	Surface
Materials	Canopy: Steel Rods: Steel Body: Aluminum
Light source	4 x LED 4.5W 700mA
LED	CRI>90 1961.1 lm 108 2700 K
Driver	CC - Constant Current 700 120~277 V 50/60 HZ
Remarks	Cable can be adjusted in the field. 157 max.
	LED
	IP20 Multi-volt (Dry Location
	50-60Hz <b>4</b> 0-10V
Application	Pendants
Packaging	2 Box 45.59 m x 44.61 m x 3.39 m Gross weight 22.91 Net weight 19.52 Vol. 5.5409



Lighting effect General Lighting

the light in all directions.

Lamp for general lighting that equally distributes

0 0

11 3/4\* 30 1/2" max. 157" 311/2" 51″ 3/4″ ŝ 1/4 39,1

Optional: Extra cable length Min. Quantity, upcharge and extra lead time apply

39 1/4


## $|\langle | \rangle | \rangle$


### 0310

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet





11 3/4

31 1/2

Min. Quantity, upcharge and extra lead time

25 1/2"


40 1/4"

41 1/2"

16 3/4"

Optional: Extra cable length

max. 157″

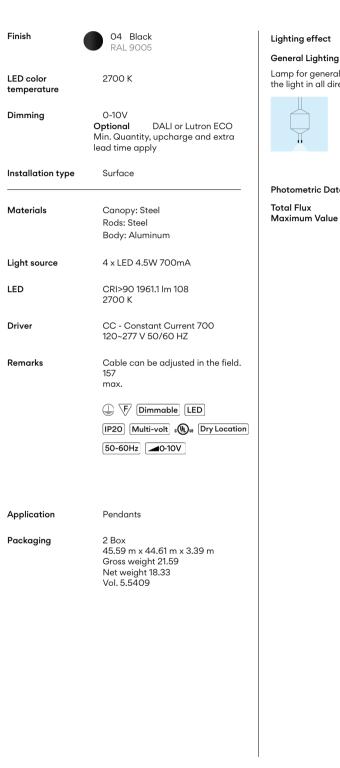

### Lamp for general lighting that equally distributes the light in all directions.



Total Flux Maximum Value

0 0

apply

## $/ | \mathcal{R} | \wedge$

### 0311

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet





Finish	04 Black RAL 9005
LED color temperature	2700 К
Dimming	0-10V Optional DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply
Installation type	Surface
Materials	Canopy: Steel Rods: Steel Body: Aluminum
Light source	4 x LED 4.5W 700mA
LED	CRI>90 1961.1 lm 108 2700 K
Driver	CC - Constant Current 700 120~277 V 50/60 HZ
Remarks	Cable can be adjusted in the field. 157 max.
	↓ F Dimmable LED
	[IP20] Multi-volt (b) # Dry Location   50-60Hz -10V
Application	Pendants
Packaging	2 Box 32.8 m x 32.24 m x 3.39 m Gross weight 18.72 Net weight 15.75 Vol. 3.6269


#### General Lighting Lamp for general lighting that equally distributes the light in all directions.



Lighting effect

Photometric Data

Total Flux Maximum Value 0 0



Optional: Extra cable length Min. Quantity, upcharge and extra lead time apply

## $\setminus | \exists | \land$


### 0312

Design By Arik Levy

Wireflow - designed by Arik Levy. A sculptural luminaire that reinterprets and puts a completely new twist on the classical chandelier. Its elegant structure allows combinations of the enhanced black electrical wires and lacquered metal rods to create large, visually dynamic chandeliers and sculptural luminaires.

### Spec sheet





11 3/4\*

13 3/4″

19 3/4° X 19 3/4

40 1/4" max. 157"

25″

12 3/4"

Finish	O4 Black	Lighting effect
	RAL 9005	General Lighting
LED color temperature	2700 K	Lamp for general lighting that equally distributes the light in all directions.
Dimming	O-10V <b>Optional</b> DALI or Lutron ECO Min. Quantity, upcharge and extra lead time apply	
Installation type	Surface	Photometric Data
Materials	Canopy: Steel Rods: Steel Body: Aluminum	Total Flux O Maximum Value O
Light source	4 x LED 4.5W 700mA	
LED	CRI>90 1961.1 lm 108 2700 K	
Driver	CC - Constant Current 700 120~277 V 50/60 HZ	
Remarks	Cable can be adjusted in the field. 157 max. To Dimmable LED [P20] Multi-volt @ Inv Location 50-60Hz IOV	
Application	Pendants	
Packaging	2 Box 32.8 m x 32.24 m x 3.39 m Gross weight 18.28 Net weight 15.35 Vol. 3.6269	

## Л

#### Photometric Data

Optional: Extra cable length Min. Quantity, upcharge and extra lead time apply