

North

Design by Arik Levy.

Reference

5622.

Application

Floor Lamps

Installation type

Surface mounted

Description

North Floor lamp, designed by Arik Levy, allows light where it is required with arms from the base to supply the light at any angle with adjustable rods. The base is supplied with black stones as a counter weight. North also has electronic control push dimming and a LED light source.

Diffuser

PMMA diffuser

Materials

Cane: Carbon fiber

Shade: Aluminum

Base: Steel

Diffuser: Aluminum

Finishes



5622-10 White (NCS S 0300-N)




5622-11 Black (NCS S 8500N)



5622-24 Cream (NCS S 2005-Y50R)

Sketch




Electrical characteristics

3 x LED 9W 350mA

Total 27.0 W



VIBIA

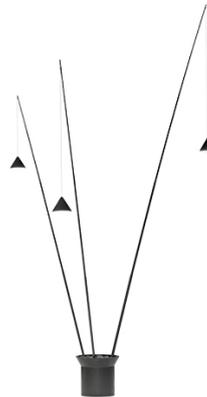

Light source: 2700K CRI >80 3123 lm 116 lm/W

Fixture: 2363.67 lm 87.54 lm/W

Driver included: CC - Constant Current 350 mA 110~240V 50/60Hz

Electronic dimming: PUSH

Technical characteristics

- Can be connected with or without plug.
- cULus Certification is only approved for 120V
- Push button on base dimming

Installation and assembly

Please see the installation manual

Light distribution

General lighting - opaque shade

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



Photometric data

Efficiency : 68.79 lm/W

Coordinate system : CG

Total flux : 2294.94

Maximum value : 1271.08 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

Certificates

